


product datasheet

fine thread drywall screws (zinc)



www.evolutionfasteners.co.uk

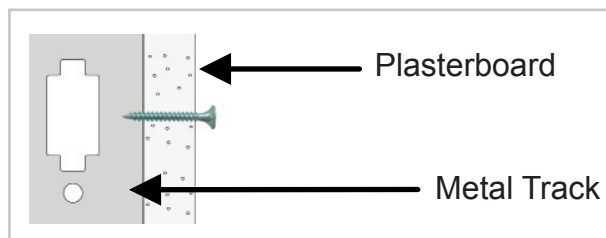

Evolution Fasteners (UK) Ltd
 Unit 2A & 2B
 Clyde Gateway Trade Park
 Dalmarnock Road
 Rutherglen
 Glasgow
 G73 1AE
 Tel: +44 (0)141 647 7100
 Fax: +44 (0)141 647 5100
 technical@evolutionfasteners.co.uk

Designed for:	Fixing plasterboard to metal studs of up to 1mm.
Head Style:	Bugle
Drive Bit:	Phillips 2
Drill Point:	Super sharp point
Thread Form:	Single thread, fine
Coating:	Electro plated zinc
Shank Material:	Carbon steel
Material Grade:	AISI C1022
Effective Thread Length:	Fully threaded
Recommended Drill Speed:	4,000 - 6,000 RPM
Steel Thickness:	0.5mm - 1.0mm

Fine Zinc Drywall Range				
Product Code	Size	Box Qty	Carton Qty	Fixture Thickness
DWSZ25	3.5mm x 25mm	1,000	10,000	15mm
DWSZ32	3.5mm x 32mm	1,000	10,000	22mm
DWSZ38	3.5mm x 38mm	1,000	10,000	28mm
DWSZ42	3.5mm x 42mm	1,000	10,000	32mm
DWSZ50	3.5mm x 50mm	1,000	10,000	40mm
DWSZ65	3.5mm x 65mm	500	5,000	55mm
DWSZ75	3.5mm x 75mm	500	5,000	65mm
DWSZ90	3.5mm x 90mm	500	3,000	80mm
DWSZ100	3.5mm x 100mm	500	3,000	90mm
DWSZ125	3.5mm x 125mm	250	2,500	115mm
DWSZ150	3.5mm x 150mm	200	2,000	140mm

Ultimate Mechanical Performance			
Diameter	Tensile Strength	Shear Strength	Torque
3.5mm	1.4kN	0.8kN	2.7Nm

Hardness Ratings (Vickers)	
Diameter	Surface Hardness
3.5mm	550HV

Ask for Evolution



Drywall Screws



Tek Screws



Collated Screws



Masonry Screws



Anchors



Clips & Brackets